

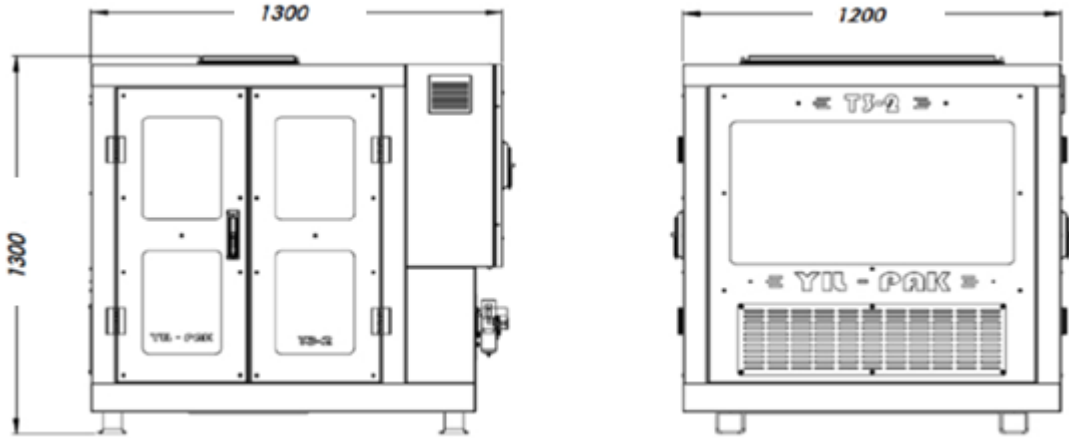

TECHNICAL SPECIFICATIONS

| | | |
|-----------------------------|---|--|
| Machine Width | : | 1200 mm |
| Machine Length | : | 1300 mm |
| Machine Height | : | 1300 mm |
| Working Air Pressure | : | 4 bar |
| Energy | : | 380 V / 400 V |
| Power | : | 4 kW |
| Machine Weight | : | 450 kg |
| Dosing Scale | : | 1 - 25 kg |
| Dosing Accuracy** | : | ± 8 gr |
| Pan Volume | : | 40 / 60 / 80 lt |
| Number Of Pans | : | 2 pcs |
| Product Flow Control | : | Servo Controlled Feed Bucket |
| Weight Control | : | High Speed Load Cell Control |
| Operator Display*** | : | 7" multi-touch (color) Omron (standard) |
| Machine Material | : | Product contact points AISI 304 stainless steel / Chassis and Body Structure St 37-St 52 and Electrostatic Painted |

* All specifications and feature can be determined upon customer request

** Values are determined for detergents

*** 10" multi-touch (color) Omron is used when delivered with packaging machine



FEATURES

- CE certified
- Fully automatic
- Long-lasting design
- Simple and compact design enables easy assembly / disassembly / cleaning
- Dust-free, clean production standards with suction points in the main body
- High-precision, real-time dosing with servomotor-controlled product flow system
- Motion control and reporting database in automation system
- Lubricant-free pneumatic instruments
- Hygienic design with stainless material
- Maximum energy efficiency with low air and electricity consumption
- New generation PLC and professional control software
- High-speed control cards for dosing systems
- Multi-function, user-friendly operator panel
- Manual test page allowing manual positioning of working parts
- Single scale / double scale filling options
- Suitable for integration with all kind of packaging machines by using reduction connections