
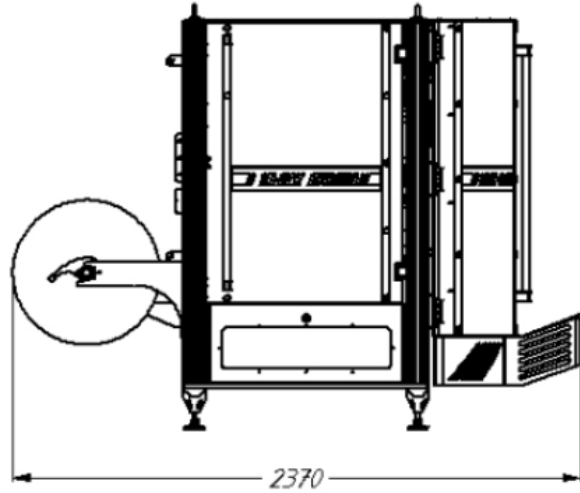



**HIGH  
SPEED**
**WATCH  
VIDEO**
**TECHNICAL SPECIFICATIONS**

<b>Machine Width</b>	:	1280 mm
<b>Machine Length</b>	:	2370 mm
<b>Machine Height</b>	:	1700 mm
<b>Air Pressure</b>	:	6 Bar
<b>Energy</b>	:	400 V
<b>Power</b>	:	15 kW
<b>Machine Weight</b>	:	1050 kg
<b>Film Types</b>	:	OPP, CPP - PET, AL-PE Other Laminated Films
<b>Packaging Speed (max)</b>	:	180 pcs/min
<b>Reel Outer Diameter (max)</b>	:	600 mm
<b>Reel Inner Diameter</b>	:	80 mm
<b>Reel Width (max)</b>	:	500 mm
<b>Horizontal Jaw Opening (max)</b>	:	160 mm
<b>Film Pulling Pallet Distance (min)</b>	:	40 mm
<b>Film Pulling Pallet Distance (max)</b>	:	170 mm
<b>Horizontal Jaw Sealing Length</b>	:	290 mm
<b>Vertical Jaw Sealing Length</b>	:	Infinite
<b>Package Length (max)</b>	:	450 mm
<b>Package Width (max)</b>	:	230 mm
<b>Operator Display</b>	:	7" touch (color) Omron (standard)
<b>Machine Material</b>	:	Product contact points AISI 304 stainless steel Chassis and Body Structure St 37-St 52 and Electrostatic Painted

*\* All specifications and feature can be determined upon customer request*

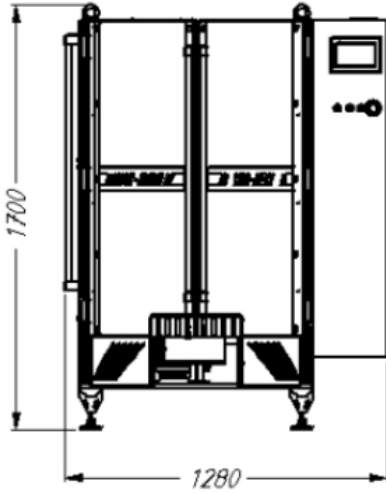

### FEATURES

- CE certified
- Fully automatic
- Suitable for working with HDPE+LDPE laminated PE derivative materials
- Simple design enabling easy maintenance
- Multi-function, user-friendly operator panel
- PLC based automation software
- Motion control and reporting database in automation system
- Accessibility via Internet with Ethernet connection port
- Servomotor-controlled horizontal jaw and film pulling system
- Easy, fast and ergonomic form tube change
- Easy, fast and ergonomic interchangeable jaw system
- Suitable to operate with or without photocell
- Maintenance-free, long-lasting vertical & horizontal jaws with tube resistance
- Lubricant-free pneumatic instruments and design
- Visual & mechanical centering points & centering registry database enabling min downtime & higher efficiency in product changes (reel, size, product ...)
- Manual test page allowing manual positioning of working parts
- Perforation system for air evacuation within the bag
- Lift system enabling transfer to conveyor system
- Horizontal & vertical jaws with adjustable pressure-sensitivity
- Film centering system tolerating possible film shifts
- Auto-stop feature at the end of film
- PID controlled heating system for precise temperature setting of the jaw
- PID controlled asynchronous motor film feeding system for sensitive film tension
- Pneumatic reel shaft
- High speed reel change with new film adding apparatus (max 2 min)
- Mechanical structure enabling integration with all kinds of coding device